Product Sheet
FRAME

holte.studio

HOLTE

INTRODUCTION

FRAME fronts are constructed from moisture-resistant MDF with a hand-finished veneer, and paired with solid timber borders to achieve a neat and natural look. The straight and chamfered frames can be adapted to suit both contemporary and traditional kitchens.

VARIANTS

FRAME is available in two variants; Square and Chamfer. Choose from a range of veneer finishes and matching frame timbers.

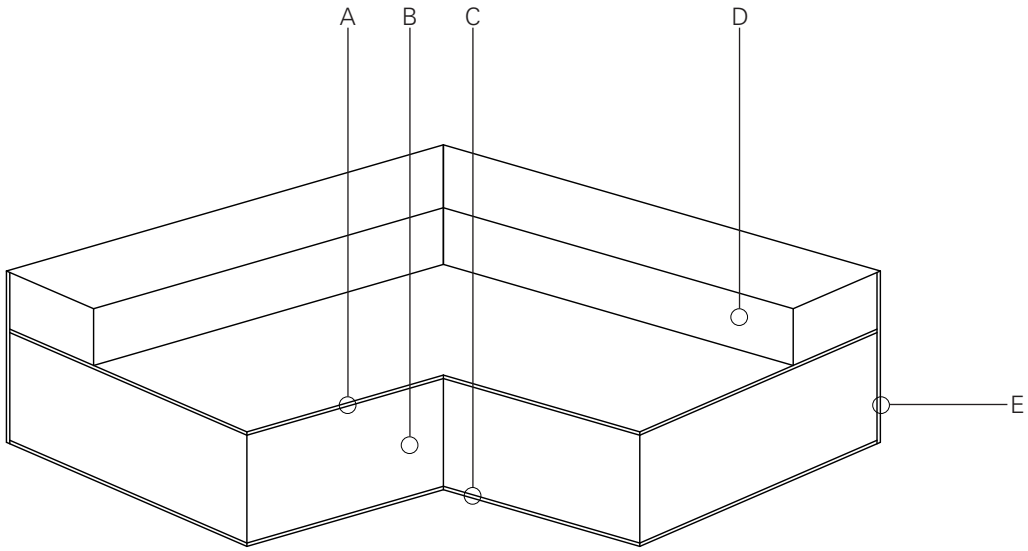


Square



Chamfer

SPECIFICATION
FRAME Square



Isometric cross-section
showing front construction

SPECIFICATION

Total thickness	30mm
Corners & edges	1mm radius
Veneer cut	Crown or quarter
Veneer matching	Reverse slip-matched (crown) or slip-matched (quarter)
Grain direction	Vertical or horizontal
Surface treatment	Clear matte lacquer
A - Front	0.6mm real timber veneer
B - Core	18mm moisture resistant MDF
C - Back	0.6mm real timber veneer
D - Detail	Solid timber square profile
E - Edge	2mm timber edging

Please note that measurements may vary according to material tolerances.

Fronts are veneered individually so that the grain of the timber runs through every panel. Ensure panel numbers are carefully followed to maintain grain matching.

FABRICATION GUIDANCE

If holes require drilling on site for client supplied handles, follow the following steps to avoid split out:

1. Drill a small pilot hole with a 3mm wood bit
2. Using an HSS bit, drill in reverse direction to just penetrate the veneer on both sides of panel
3. Drill though the hole

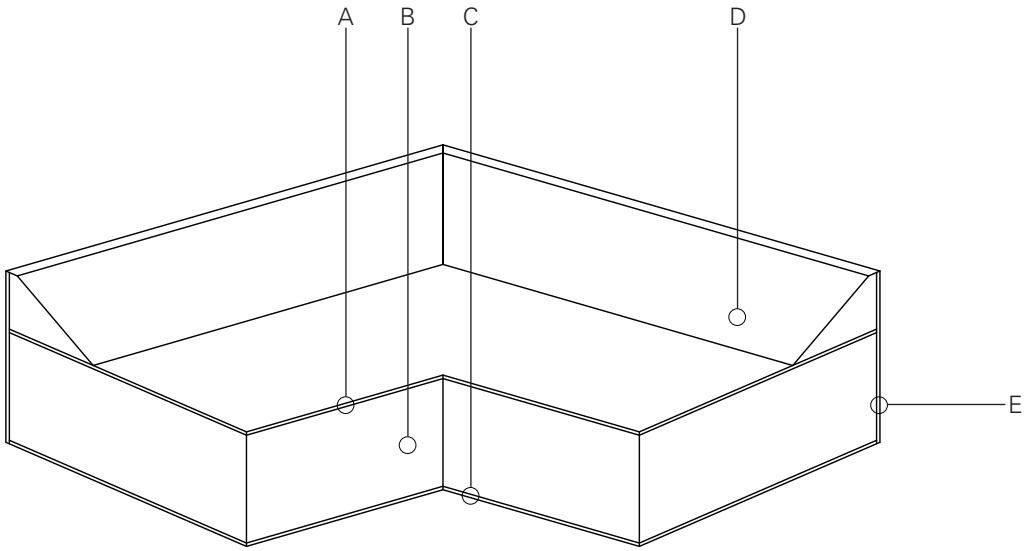
CARE & MAINTENANCE

Dust regularly with a slightly damp, soft, lint-free cloth. Wipe dry with a dry, soft cloth in the direction of the wood grain. Spills should be immediately wiped up with a damp cloth. Once a month clean the surface with a soft cloth dampened with a small amount of warm soapy water.

Lacquer offers a layer of protection to the surface of your veneered fronts. In the unlikely event that the lacquer is scratched, the door will need to be removed, sanded back and re-lacquered. Please contact a specialist if required.

SELECT HOLTE

SPECIFICATION
FRAME Chamfer



Isometric cross-section
showing front construction

SPECIFICATION

Total thickness	30mm
Corners & edges	1mm radius
Veneer cut	Crown or quarter
Veneer matching	Reverse slip-matched (crown) or slip-matched (quarter)
Grain direction	Vertical or horizontal
Surface treatment	Clear matte lacquer
A - Front	0.6mm real timber veneer
B - Core	18mm moisture resistant MDF
C - Back	0.6mm real timber veneer
D - Detail	Solid timber chamfered profile
E - Edge	2mm timber edging

Please note that measurements may vary according to material tolerances.

Fronts are veneered individually so that the grain of the timber runs through every panel. Ensure panel numbers are carefully followed to maintain grain matching.

FABRICATION GUIDANCE

If holes require drilling on site for client supplied handles, follow the following steps to avoid split out:

1. Drill a small pilot hole with a 3mm wood bit
2. Using an HSS bit, drill in reverse direction to just penetrate the veneer on both sides of panel
3. Drill though the hole

CARE & MAINTENANCE

Dust regularly with a slightly damp, soft, lint-free cloth. Wipe dry with a dry, soft cloth in the direction of the wood grain. Spills should be immediately wiped up with a damp cloth. Once a month clean the surface with a soft cloth dampened with a small amount of warm soapy water.

Lacquer offers a layer of protection to the surface of your veneered fronts. In the unlikely event that the lacquer is scratched, the door will need to be removed, sanded back and re-lacquered. Please contact a specialist if required.

DESIGN GUIDANCE



HANDLES

FRAME is available with physical handles in a variety of finishes from carefully selected partners who manufacture in the UK. Alternatively handles can be sourced separately.



Swarf Hardware



Armac Martin



Holte Hardware

NB: Custom integrated handle details are available on request on the Square profile only.

DESIGN GUIDANCE

FRAME is available for fronts only with panels for this style made in our EDGE Veneer style.

The maximum length or width for a FRAME panel is 200mm. It looks best in a simple configuration with fewer fronts e.g. 2 drawer fronts to a cabinet. Likewise, we recommend repeated wider front widths.

FRAME can be highly effective as fronts for a focal point or feature e.g. an island, with fronts on other cabinetry in EDGE or CORE.

The feature glazed cabinets are a complimentary addition to a FRAME design as the variants are echoed in the frame profiles of the glazed doors.

SELECT HOLTE

COLOURS & MATERIALS

VENEER

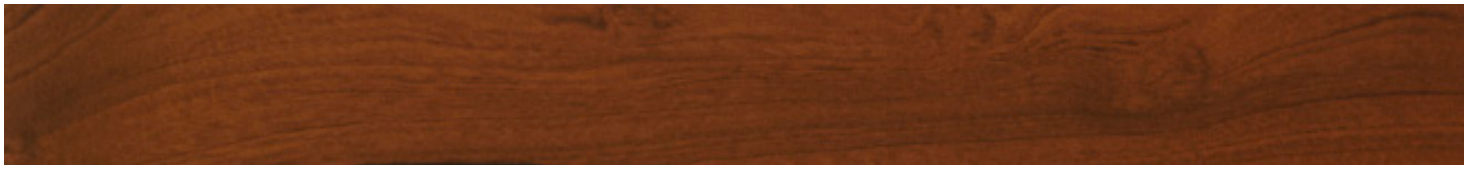

White stained ash


Maple

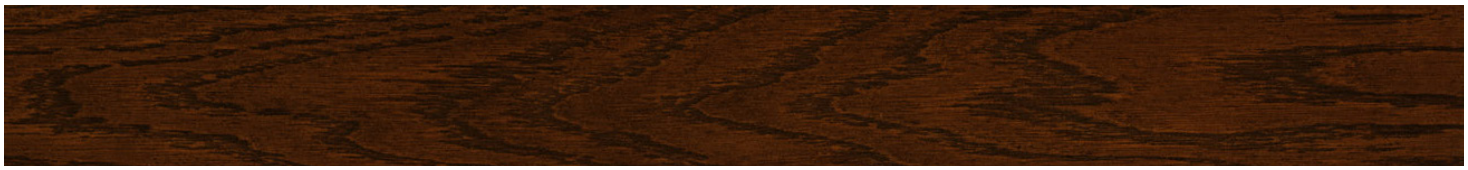

Ash


Oak


Cherry


Sapele


Walnut


Dark stained oak

SELECT HOLTE